


# SBP22T-VIR75K42A



## Dimensions

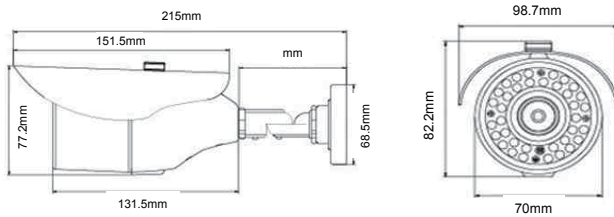

## Product Summary

- 1/3" Progressive CMOS Sensor
- Full HD (1920 x 1080 30P) TVI Video Out
- WDR (Wide Dynamic Range)
- 3D + 2DNR (Digital Noise Reduction)
- SENS UP, SMART IR, DEFOG
- HLMASK (High Light Masking)
- Privacy Masking, Motion Detection
- LSC (Lens Shading Correction)
- ACE (Adaptive Contrast Enhancer)
- 2.8~12mm Mega Pixel Lens (ICR)
- 42pcs IR LEDs
- OSD (On Screen Display) Option

## Major Specifications

\* OSD Menu is subject to change without prior notice

| MODEL NAME            | SBP22T-VIR75K42A  |
|-----------------------|---|
| Image Device          | 1/3" SONY CMOS, 2.43Megapixel                               |
| Total Pixels          | 2000(H) x 1241(V) / 2,482,000 (Pixel)                       |
| Effective Pixels      | 1984(H) x 1225(V) / 2,430,400 (Pixel)                       |
| Scanning System       | Progressive Scan  |
| Synchronization       | Internal Synchronization                                    |
| Horizontal Resolution | More than 1,000 TV Lines                                    |
| Video Output          | <b>1080P(Full-HD) TVI</b> (NTSC/PAL)                        |
| S/N Ration            | More than 50dB (AGC Off)                                    |
| Lens                  | 2.8~12mm Mega Pixel Lens <b>(External Zoom &amp; Focus)</b> |
| LED                   | 42pcs IR LEDs   |
| Storage Temp.         | 14°F ~ 122°F (-10°C~ + 50°C)                                |
| Operating Temp.       | 4°F ~ 140°F (-20°C~ + 60°C)                                 |
| Humidity              | Less than 80%   |
| Power Source          | DC12V 550mA   |
| Dimensions            | 70mm(Φ) X 215mm(L) X 82.2mm(H)                              |
| Net Weight            | Approx. 700g  |