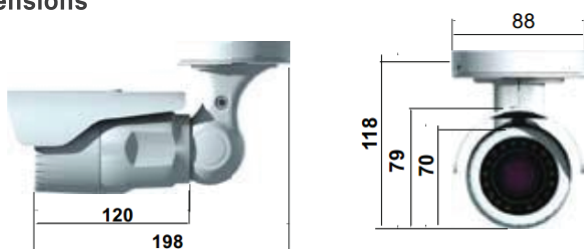


SBP4K-VIR7604**Dimensions****Product Summary**

- 1/2.5" 8,51Mega Pixel SONY progressive scan CMOS image sensor for excellent image quality
- 4k UHD(3840 X 2160 @30/25fps) Resolution
- Digital Coaxial Transmission Technology
- Compatible with coaxial cable RG59type,3C2V,5C2V
- Ultra Long Transmission Distance : 800M
- No IP setting required
- Solid performance / Max.30fps @ 2160p(4K UHD)
- H,265 + Video Compression Technology
- Digital Zoom, Motion Detection
- 4 x Hi Power Leds IR Beam Distance :30Meters
- Easy set up like analogue CCTV
- 12VDC/AC24V
- IP66 Ratings

Major Specifications

* OSD Menu is subject to change without prior notice

Model Name		SBP4K-VIR7604
camera	Image Sensor	1/2.5" 8Mp progressive scan CMOS sensor
	Lens type	12Megapixel 3.5~11mm Varifocal Lens
	Maximum aperture ratio	F1.2
	Minimum illumination	0.1Lux(Color), 0.01Lux(B/W), 0Lux(LED On)
	Electronic shutter speed	Automatic: Min .1/50,000sec-Max. 1/60sec Manual :Min .1/10,000sec-Max. 1/30sec
	Privacy masking	On/off
	Motion	On/off
	Flip mode	Horizontal, Vertical
	Image enhancement	Defog, AGC, AE, AWB, TDN, D-WDR, 2D/3D DNR, DIS, BLC, Sens-up
	IR LED	4 x Hi Power Leds
	Video Compression	H.265(High .Main . Base line profile)
	Frame rate	Up to 30/25 fps @ 3840*2160, Up to 30/25 fps @ 3072*2048 30/25 fps @ 2592*1944, 30/25 fps @ 2592*1520 30/25 fps @ 1920*1080, 30/25 fps @ 1280*720
	Resolutions	3840*2160 /3072*2048/2592*1944/2592*1520 2048*1520 /1920*1080 / 1280*720 / D1 / CIF
	Frequency	50/60Hz
General	Gain Control	Automatic: Min .1/50,000sec-Max. 1/60sec, Manual :Min .1/10,000sec-Max. 1/30sec
	Auto white Balance	ATW-Indoor/Out door, Auto , Push , Manual
	Certification	CE, FCC, KC, ROHC
	Power supply	Min DC12V/1.5A,
	Power consumption	850mA/ IR on
	Operating condition	-10°C ~ 50°C (14°F ~ 122°F) / 20% ~ 80% RH
	Dimension	88(W) x 118(H) x 198(D)mm
Weight	850g	