


SDP22-FIR8024



Dimensions

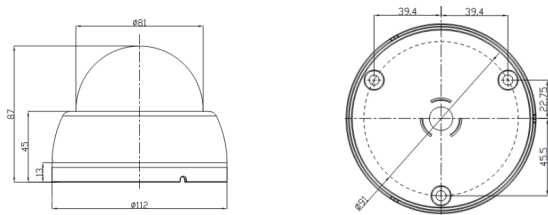

Product Summary

- 1/3" Progressive CMOS Sensor
- TDN 24 IR LED
- Full HD (1920 x 1080 30P) Video Out
- WDR (Wide Dynamic Range)
- 3D + 2DNR (Digital Noise Reduction)
- SENS UP, SMART IR, DEFOG
- HLMASK (High Light Masking)
- Privacy Masking, Motion Detection
- LSC (Lens Shading Correction), ACE,
- ACE (Adaptive Contrast Enhancer)
- 3.6mm Mega Pixel Lens (ICR)
- OSD (On Screen Display)
- CVBS Out (For Installer)

Major Specifications

* OSD Menu is subject to change without prior notice

| MODEL NAME | SDP22-FIR8024 |
|-----------------------|---------------------------------------|
| Image Device | 1/3" SONY CMOS, 2.43Megapixel |
| Total Pixels | 2000(H) x 1241(V) / 2,482,000 (Pixel) |
| Effective Pixels | 1984(H) x 1225(V) / 2,430,400 (Pixel) |
| Scanning System | Progressive Scan |
| Synchronization | Internal Synchronization |
| Horizontal Resolution | More than 1,000 TV Lines |
| Video Output | HD SDI / CVBS (For Installer) |
| S/N Ration | More than 50dB (AGC Off) |
| Lens | 3.6mm Mega Pixel Lens |
| LED | 24 LED |
| Storage Temp. | 14°F ~ 122°F (-10°C ~ + 50°C) |
| Operating Temp. | 4°F ~ 140°F (-20°C ~ + 60°C) |
| Humidity | Less than 80% |
| Power Source | DC12V 300mA |
| Dimensions | 112mm(Φ) X 87mm(H) |
| Net Weight | Approx. 150g |